



City of Cambridge


Purchasing Department

Cynthia H. Griffin
Purchasing Agent

TO: All Bidders
FROM: City of Cambridge
DATE: January 22, 2013
RE: File No. 5994 – Danehy Park Artificial Turf Field Project - Addendum No. 4

The following questions were submitted and answered.

All other details remain the same.



CYNTHIA H. GRIFFIN
PURCHASING AGENT

Addendum No. 4



Artificial Turf Field Project, Soccer Fields 1 and 2, Danehy Park, Cambridge, MA

ADDENDUM NO. 4

Date Issued: January 21, 2013

CONTRACTOR QUESTIONS AND RESPONSES

| | |
|--------------|--|
| Question #1: | It is clearly specified and described in detail to provide a 2.5" round fence post to sleeve over the existing square ornamental fence posts in the process of constructing a new 4' clf fence system along New Street. The problem lies in that the existing fence posts are 2.5" x 2.5" square posts and the smallest round pipe that can fit of the square is 4" fence pipe. Please advise if we are to carry 2.5" round pipe for sleeving or 4" round pipe for sleeving? |
| Response | Refer to reissued Detail 4 as attached. |

Changes to the Drawings:


On sheet L-2 **REPLACE** note at top of sheet to the following: "ADD ALT: REMOVE AND DISPOSE OF APPROXIMATELY 750 LF OF EXISTING ORNAMENTAL FENCE AT ENTIRE FRONT ALONG NEW STREET TO RAILROAD TRACKS. LOCATE NEW POSTS AND FOOTINGS IN THE SAME LOCATIONS AS THE EXISTING FOOTINGS."

On sheet L-5, **REPLACE** Detail 3 with the attached revised detail.


On sheet L-5, **REPLACE** Detail 4 with the attached revised detail.

Changes to the Specifications:

Under specification section 02830.2.02.B.1.e **DELETE** "POSTS FOR REPLACEMENT OF ORNAMENTAL FENCE ALONG NEW STREET: 4-FT HIGH FENCE - (2.5 IN OD) @ 3.65 LB/FT (SIZE OF POST TO ALLOW NEW POST TO BE INSTALLED OVER EXISTING POST TO BE CONFIRMED IN FIELD WITH ENGINEER PRIOR TO ORDERING MATERIALS. "

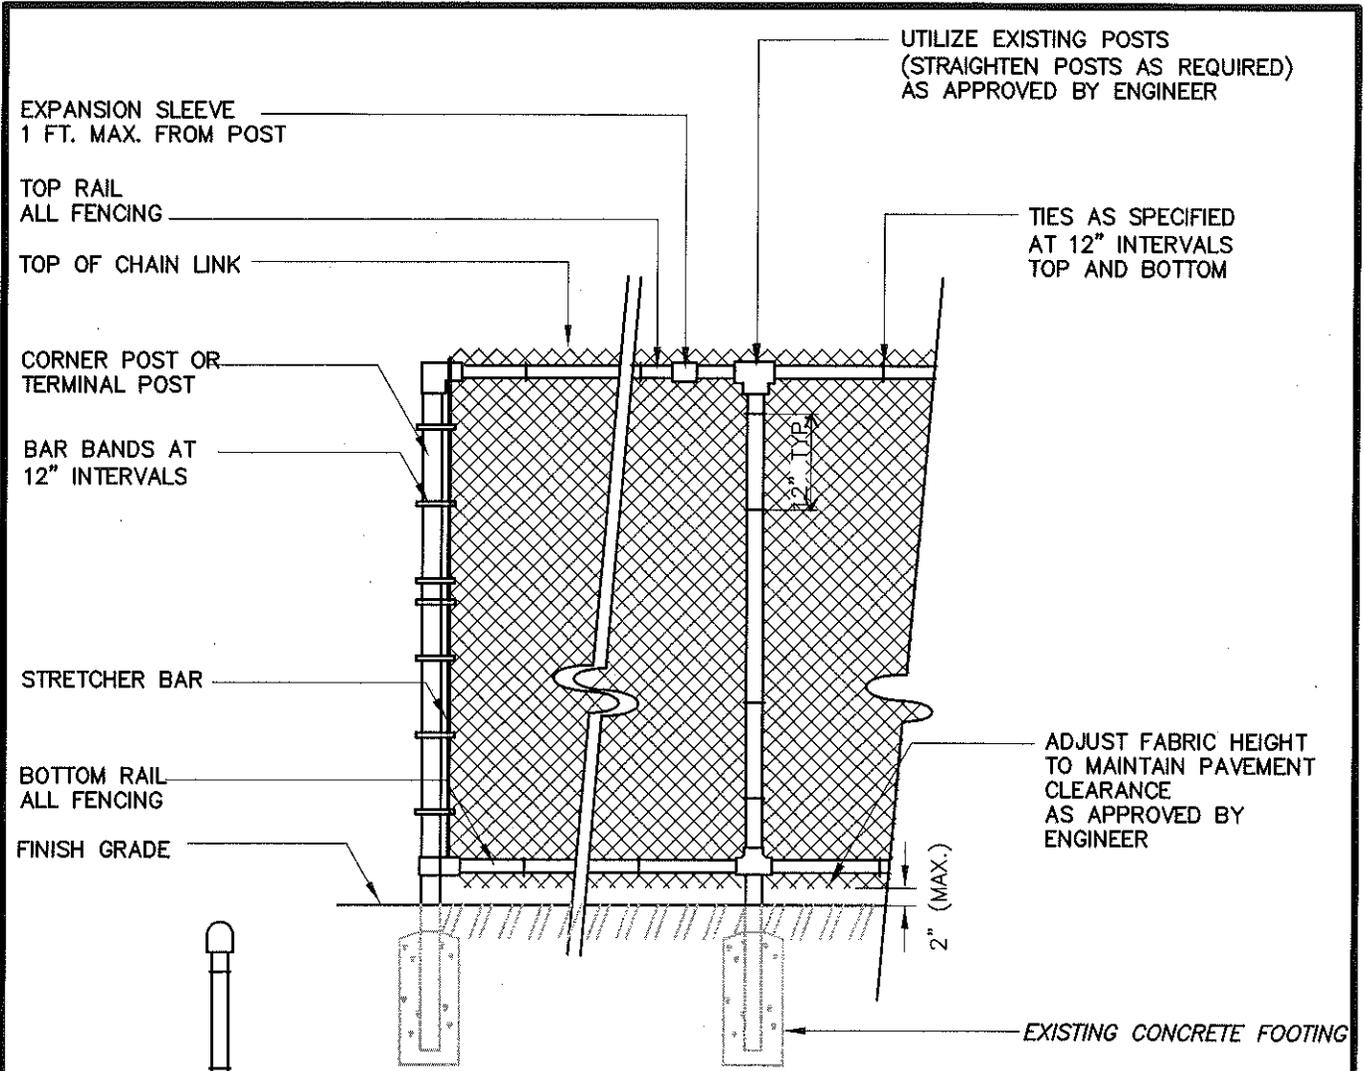

ELEVATION

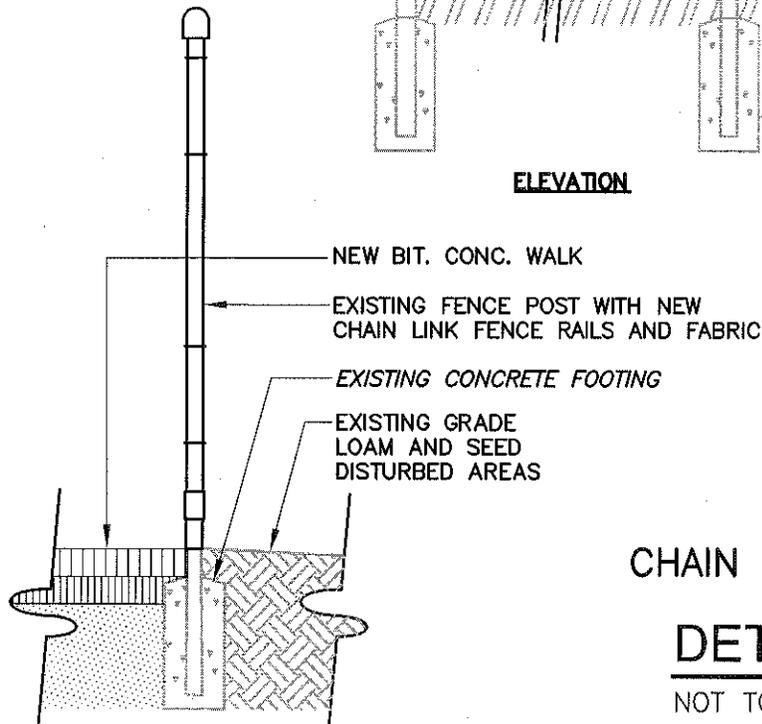

SECTION


NOTE:

FOR ALL TYPE 2 FENCE, REMOVE EXISTING CHAIN LINK FENCE FABRIC AND RAILS AS NOTED. STRAIGHTEN POSTS AS REQUIRED. INSTALL NEW 4-FT HIGH CHAIN LINK FENCE TO LIMITS SHOWN.

CHAIN LINK FENCE TYPE 2

DETAIL

NOT TO SCALE



| | | | | |
|----------------------|--|---|--------------|------------|
| DATE <u>JAN 2013</u> | SHEET NO. | | ADDENDUM NO. | FIGURE NO. |
| | ARTIFICIAL TURF FIELD PROJECT, DANEHY PARK | 3 | | |
| | | | 4 | 1 |

EXPANSION SLEEVE
1 FT. MAX. FROM POST

TOP RAIL
ALL FENCING

TOP OF CHAIN LINK

CORNER POST OR
TERMINAL POST

BAR BANDS AT
12" INTERVALS


STRETCHER BAR

BOTTOM RAIL
ALL FENCING

FINISH GRADE

LINE POST


TIES AS SPECIFIED
AT 12" INTERVALS
TOP AND BOTTOM

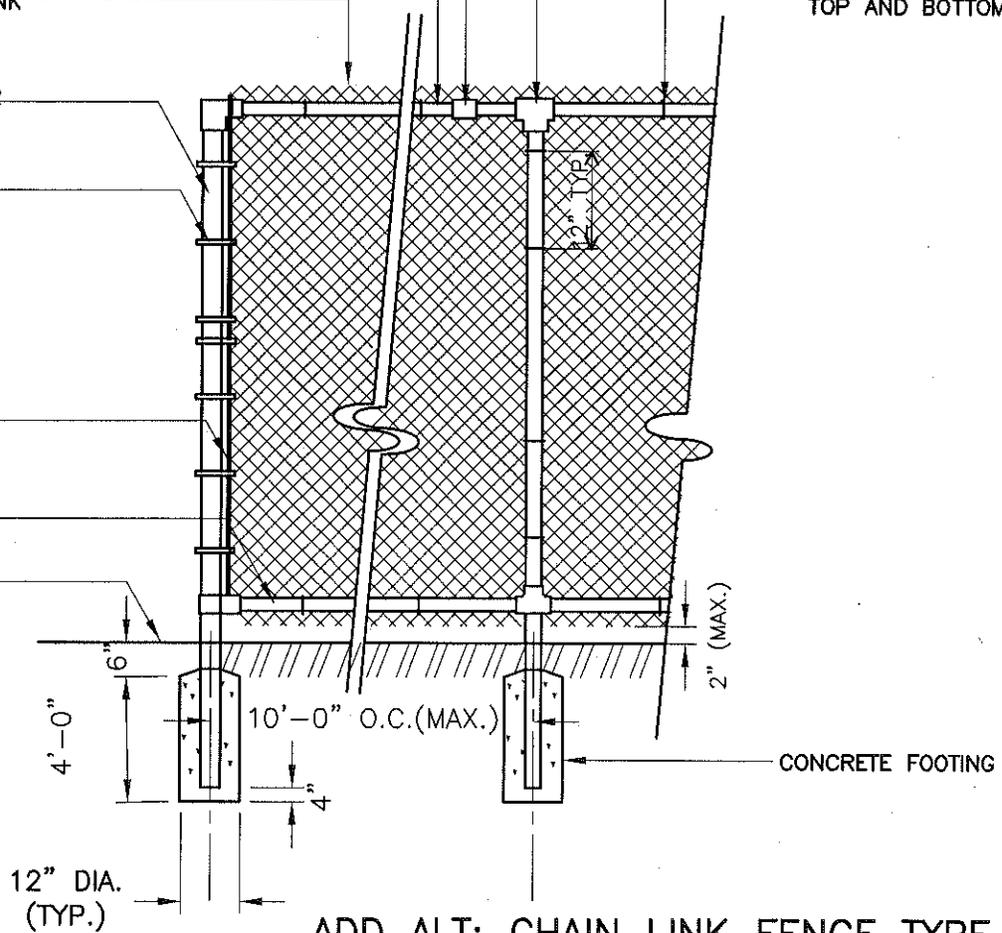

ADD ALT: CHAIN LINK FENCE TYPE 3

DETAIL

NOT TO SCALE



NOTES:

1. REMOVE EXISTING ORNAMENTAL FENCE IN ITS ENTIRETY AND REPLACE WITH NEW 4-FT HIGH CHAIN LINK FENCE.
2. FENCE FOOTINGS SHALL BE AUGURED HOLES. CONTRACTOR SHALL REMOVE AND DISPOSE OF EXISTING TOPSOIL AND GRAVEL. REMOVE MBTA SUBGRADE FILL FOR REUSE ON SITE.
3. SUBGRADE SOILS CONSIST OF TOPSOIL, GRAVEL SOIL (MIN. 6") AND MBTA FILL (APPROX. 15FT.) SEE GEOTECHNICAL INFORMATION APPENDED TO SPECIFICATIONS FOR SOIL MATERIALS AND DEPTHS ANTICIPATED TO BE ENCOUNTERED WITH EXCAVATIONS.
4. REMOVE EXISTING POSTS AND FOOTINGS. NEW FOOTINGS SHALL BE LOCATED IN THE SAME LOCATIONS. ANY EXCAVANT REMOVED SHALL BE PLACED ON SITE IN AREAS AS INDICATED ON THE PLANS.

**CDM
Smith**

DATE JAN 2013

ARTIFICIAL TURF FIELD
PROJECT,
DANEHY PARK

SHEET NO.

4

LOCATION

L-5

ADDENDUM
NO.

4

FIGURE
NO.

2